

This drawing is an integral part of the general statement of use and technical manual

Notes:

1. All dimensions are for reference only, not for construction unless certified.
2. * - Item 13 & 14 are optional. Delivered upon request. Priced separately.
3. Drawing unit: mm. (inches).
4. Saddles can be shimmed if required.
5. Do not scale drawing, may be reprinted on any paper size or copied.
6. The vessel should be supported with two straps for external saddles.
7. For further information please contact BEL.
8. Storage & installation: Indoor.
9. Vessel's ports diameters according to ANSI Standards.

Table №1 for membrane length 21" (533.4mm.).
Table №2 for membrane length 40" (1016mm.).

Shell length code	L (l.o.a.) mm, inch	P port to port, mm, Inch	S # (span) mm, inch	M, mm/in length for membranes elements		W weight kg, lb.	Article number
				mm	in		
21	757	559	410	485	19,1	10	42301-21
	29,8	22,0	16	19,1	22		
22	1290	1092	940	1019	40,1	12	42301-22
	50,8	43,0	37	40,1	26		
23	1824	1626	1480	1552	61,1	14	42301-23
	71,8	64,0	58	61,1	31		
24	2357	2159	2000	2086	82,1	16	42301-24
	92,8	85,0	79	82,1	35		
25	2892	2694	2540	2620	103,1	18	42301-25
	113,9	106,1	100	103,1	40		
26	3426	3228	3070	3154	124,2	20	42301-26
	134,9	127,1	121	124,2	44		
27	3960	3762	3600	3689	145,2	22	42301-27
	155,9	148,1	142	145,2	49		
28	4495	4297	4140	4223	166,3	23	42301-28
	177,0	169,2	163	166,3	51		
29	5030	4832	4670	4758	187,3	25	42301-29
	198,0	190,2	184	187,3	55		
30	5565	5367	5200	5293	208,4	27	42301-30
	219,1	211,3	205	208,4	60		
31	6100	5902	5740	5828	229,4	29	42301-31
	240,2	232,4	226	229,4	64		
32	6633	6435	6270	6362	250,5	31	42301-32
	261,1	253,3	247	250,5	68		

Shell length code	L (l.o.a.) mm, inch	P port to port, mm, Inch	S # (span) mm, inch	M, mm/in length for membranes elements (with membrane type)		W weight kg, lb.	Article number
				mm	in		
1	1242	1044	710	1020	40,2	12	42300-1
	48,9	41,1	28	40,2	26		
2	2258	2060	1550	2036	80,2	16	42300-2
	88,9	81,1	61	80,2	35		
3	3274	3076	2550	3052	120,2	19	42300-3
	128,9	121,1	100	120,2	42		
4	4290	4092	3250	4068	160,2	23	42300-4
	168,9	161,1	128	160,2	51		
5	5307	5109	4250	5085	200,2	26	42300-5
	208,9	201,1	167	200,2	57		
6	6325	6127	5250	6103	240,3	30	42300-6
	249,0	241,2	207	240,3	66		

Warning.

1. Never pressurize a pressure vessel that was not loaded with membrane elements.
2. Wrong manifolding may cause an excessive pressure on port what can lead to leaks.
3. Max. allowable working pressure not to exceed 300 psi. (20.7 bar).
4. Permeate internal pressure not to exceed 125 psi. (8.6 bar).
5. Operating temperature not to exceed 65°C (150°F).

Item	Part Number	Q-ty	Description	Material
1	42300-0	1	Body of Pressure Vessel	Glass/Epoxy
2	040-156-0604	2	Sideport 1.5"	Stainless steel
3	014-150-0506	2	Seal for Sideport 1.5"	EPDM
4	006-156-0452	2	Disk for Sideport 1.5"	Stainless steel
5	011-150-1202	4	Retaining ring for Sideport 1.5"	Stainless steel
6	55410208	2	Retaining ring	Stainless steel
7	003-400-0005	2	Base plate	Engineering plastic
8	55412360	2	Seal for base plate	EPDM
9	as required	2	Membrane Adapter LONG	Engineering plastic
10	as required	2	Membrane seal	EPDM
11	55412367	2	Seal for adapter	EPDM
12	55412377	6	Disk spacer	Engineering plastic

Vessel support parts - optional -				
13*	55410352	2-3	Saddle	Engineering plastic
14*	55410246	2	Strap	Stainless steel

	TITLE: BEL4-S(1.5")-300 psi. RO PRESSURE VESSEL		DESIGN	VMLS	06/08/2024
	DRAWING NO.: BEL4-S(1.5")-300		CHECK	SRS	06/08/2024
			APPR.	VMLS	06/08/2024
THIS DRAWING IS PROPERTY OF BEL GROUP LIMITED IT IS STRICTLY FORBIDDEN TO USE, COPY, REPRODUCE OR DISCLOSE ANY PART OF IT TO THIRD PARTY WITHOUT WRITTEN AUTHORIZATION.					REV.: 0

ORDER / R.F.Q. FORM - 4" SIDE PORT PRESSURE VESSELS

Please fill and send it to your contact at BEL

P.O. / R.F.Q. Number:


Customer name:

1. F/C PORTS CONFIGURATION: Please indicate side port requirement on each side of the vessel
(Mark the letter indicating port diameter in the box at each required port location)

A – 1" Victaulic B – 1.5" Victaulic (Only for 300 & 450 psi models)

Vessel's Port diameters, according to ANSI Standards.

(Ports with a diameter of 1.5" cannot be mounted in 90° with any other port)

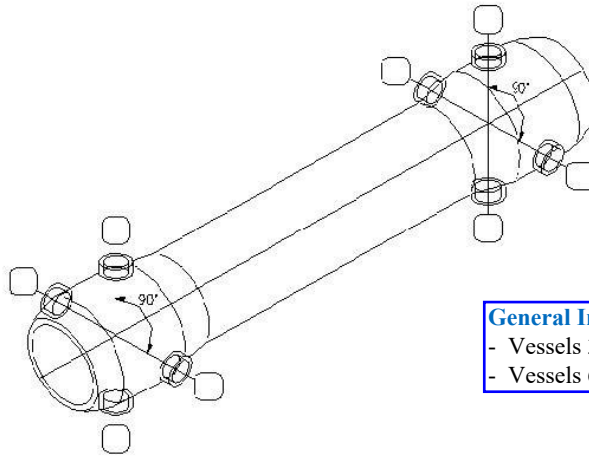

General Information for Permeate ports:

- Vessels 300 psi & 450 psi: ½" NPT Female.
- Vessels 600 psi up to 1500 psi: ½" NPT Male.

2. NUMBER OF VESSELS:

(Please use separate forms for each type in case of multi-type orders)

3. WORKING PRESSURE RATE (PSI): 300 / 450 / 600 / 1,000 / 1,200 /1500

4. NUMBER OF MEMBRANE ELEMENTS IN EACH VESSEL:

For 40" membranes length: (1 to 6)

For 21" membranes length: (1 to 12)

5. MEMBRANE BRAND AND TYPE:

6. CONFIRM TYPE – BEL4-S- (x) - - M

of ports diam. Port pressure #membranes

7. SADDLES & STRAPS (Optional): NO / YES (please contact for pricing)

8. ADAPTERS OPTIONS: Two Standard adapters / Standard & Solid (blind) adapter

9. COLOR: Standard (white, RAL 9010) / Other RAL number: (contact for pricing)

Customer signature:

Date:

FOR DETAILS PLEASE VISIT OUR WEBSITE: www.belvessels.com